



Premium Rubber Engineered Solutions





Premium Rubber

Engineered Solutions

Contact us via:



[Premiumrubber.eu](https://www.premiumrubber.eu)



info@premiumrubber.eu




+31648488145



Premium Rubber Engineered Solutions



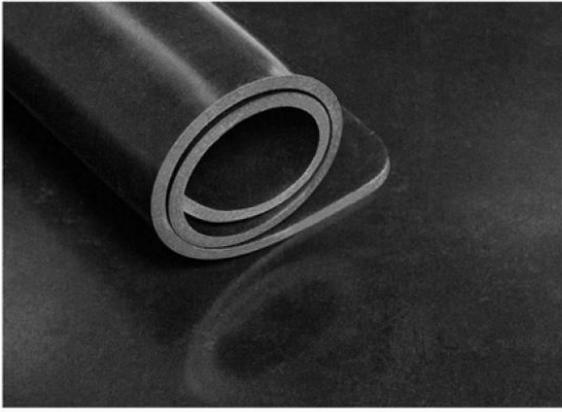

SBR rubber sheet


Black Miami

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70°C
Specific gravity:	1,5 grs/cm ³
Hardness:	70 Shore A +/- 5
Tensile strength:	3 Mpa
Elongation at break:	200%

Features: Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

Application: General purpose gaskets, shock absorbers, conveyor belts, insulation et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	10/20	SX70150 1/0
1,5	0/1	cotton	1,4/1,2	15	SX70150 1,5/0
2	0/1	cotton	1,4/1,2	10	SX70150 2/0
3	0/1/2	cotton	1,4/1,2	10	SX70150 3/0
4	0/1/2	cotton/EP100	1,4/1,2	10	SX70150 4/0
5	0/1/2	cotton	1,4/1,2	10	SX70150 5/0
6	0/1/2	cotton/EP100	1,4/1,2	10	SX70150 6/0
8	0/2	cotton	1,4/1,2	5/10	SX70150 8/0
10	0/2	cotton	1,4/1,2	5/10	SX70150 10/0
10	0	-	1	1	SX70150 10/0-1x1
12	0	-	1,4	5	SX70150 12/0
15	0	-	1,4	5	SX70150 15/0
15	0	-	1	1	SX70150 15/0-1x1
20	0	-	1,4	5	SX70150 20/0
20	0	-	1	1	SX70150 20/0-1x1
25	0	-	1,4	5	SX70150 25/0
25	0	-	1	1	SX70150 25/0-1x1
30	0	-	1,4	5	SX70150 30/0
30	0	-	1	1	SX70150 30/0-1x1
40	0	-	1	1	SX70150 40/0-1x1
50	0	-	1	1	SX70150 50/0-1x1

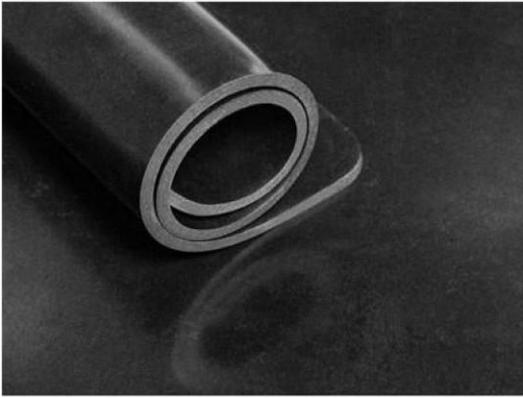

SBR rubber sheet


Zenstar

Quality:	NR/SBR
Colour:	Black
Temperature range:	-40° to +75° C
Specific gravity:	1,3 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	6 Mpa
Elongation at break:	350%
Abrasion:	250 mm ³

Features: Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

Application: General purpose gaskets, shock absorbers, conveyor belts, insulation et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	5B65130 1/0
1,5	1,4	15	5B65130 1,5/0
2	1,4	10	5B65130 2/0
3	1,4	10	5B65130 3/0
4	1,4	10	5B65130 4/0
5	1,4	10	5B65130 5/0
6	1,4	10	5B65130 6/0
8	1,4/2	10	5B65130 8/0
10	1,4/2	5/10	5B65130 10/0

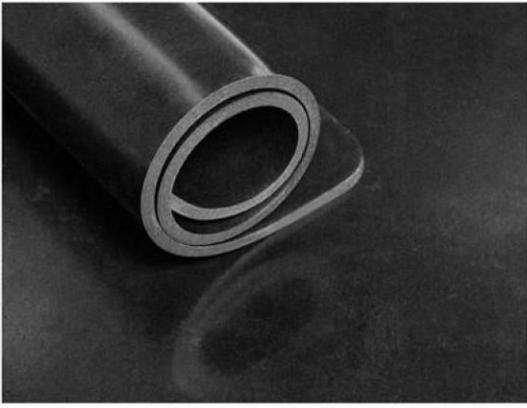

SBR rubber sheet

Black Miami 50

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,5 grs/cm ³
Hardness:	50 Share A +/- 5
Tensile strength:	3 Mpa
Elongation at break:	200%

Features: Widely used industrial rubber quality with good mechanical properties, abrasion and shock resistance.

Application: General purpose gaskets, shock absorbers, conveyor belts, insulation et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,40	10	SX50150 2/0
3	1,40	10	SX501503/0
4	1,40	10	SX501504/0
5	1,40	10	SX501505/0
6	1,40	10	SX501506/0
8	1,40	5	SX501508/0
10	1,40	5	SX50150 10/0



Premium Rubber Engineered Solutions




NBR rubber sheets



Premium Rubber Engineered Solutions



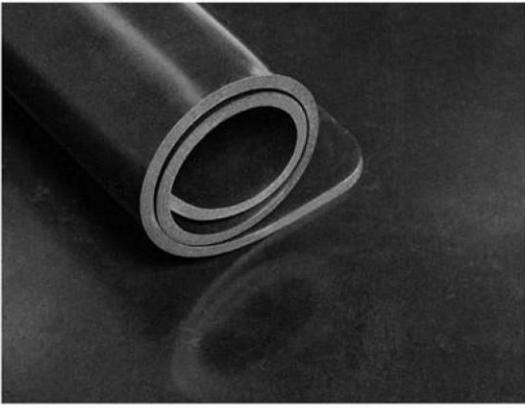

NBR rubber sheet


Satvr Eco

Quality:	NBR/SBR
Colour:	Black
Temperature range:	-30° to +90° c
Specific gravity:	1,45 grs/cm ³
Hardness:	70 Share A +/- 5
Tensile strength:	4 Mpa
Elongation at break:	200%

Features: Widely used oil and grease resistant industrial rubber quality with good mechanical properties.

Application: Chemical industries, garages, workshops et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	NB7010 1/0
1,5	0/1	nylon	1,4	15	NB7010 1,5/0
2	0/1	nylon	1,2/1,4	10	NB7010 2/0
3	0/1/2	nylon	1,2/1,4	10	NB7010 3/0
4	0/1/2	nylon	1,2/1,4	10	NB7010 4/0
5	0/1/2	nylon	1,2/1,4	10	NB7010 5/0
6	0/2	nylon	1,2/1,4	10	NB7010 6/0
8	0/2	nylon	1,2/1,4	5	NB70108/0
10	0/2	nylon	1,2/1,4	5	NB7010 10/0
12	0	-	1,4	5	NB701012/0
15	0	-	1,4	5	NB7010 15/0
20	0	-	1,4	2/5	NB7010 20/0
30	0	-	1,4	2	NB7010 30/0
40	0	-	1,4	2	NB701040/0
50	0	-	1,4	2	NB7010 50/0

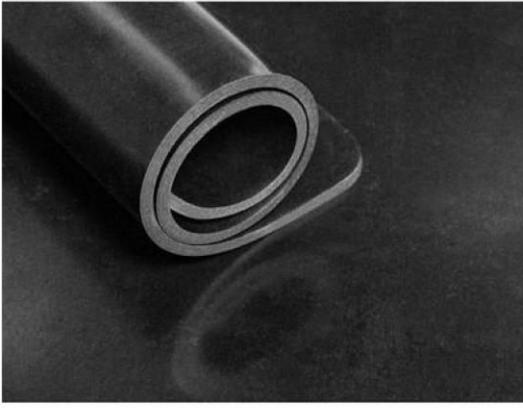

NBR rubber sheet


Satyr Medium

Quality:	NBR/SBR
Colour:	Black
Temperature range:	-25° to +80° (
Specific gravity:	1,45 grs/cm'
Hardness:	70 Share A +/- 5
Tensile strength:	5 Mpa
Elongation at break:	250%

Features: Widely used oil and grease resistant industrial rubber quality with good mechanical properties. Resistant to gasoline, oil, propane, natural gas and coal gas.

Application: Chemical industries, garages, workshops et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,2/1,4	20	NB70140 1/0
1,5	0	-	1,4	15	NB70140 1,5/0
2	0/1	nylon	1,2/1,4	10	NB70140 2/0
3	0/1/2	nylon	1,2/1,4	10	NB70140 3/0
4	0/2	nylon	1,2/1,4	10	NB70140 4/0
5	0	-	1,2/1,4	10	NB70140 5/0
6	0	-	1,4	10	NB70140 6/0
8	0	-	1,4	5	NB701408/0
10	0	-	1,4	5	NB70140 10/0

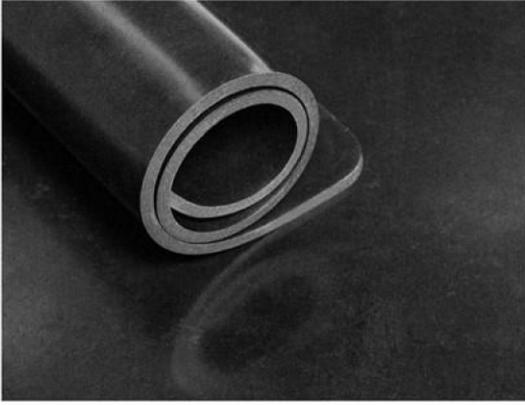

NBR rubber sheet


Satvr Premium

Quality:	NBR
Colour:	Black
Temperature range:	-30° to +110°c
Specific gravity:	1,35 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	10 Mpa
Elongation at break:	350%

Features: Excellent oil and grease resistant industrial rubber quality with good mechanical properties. Resistant to oil, super, pentane and bio-diesel.

Application: Chemical industries, garages, workshops et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	NB65130 1/0
1,5	1,4	15	NB65130 1,5/0
2	1,4	10	NB65130 2/0
3	1,4	10	NB65130 3/0
4	1,4	10	NB65130 4/0
5	1,4	10	NB65130 5/0
6	1,4	10	NB65130 6/0
8	1,4	5	NB651308/0
10	1,4	5	NB65130 10/0

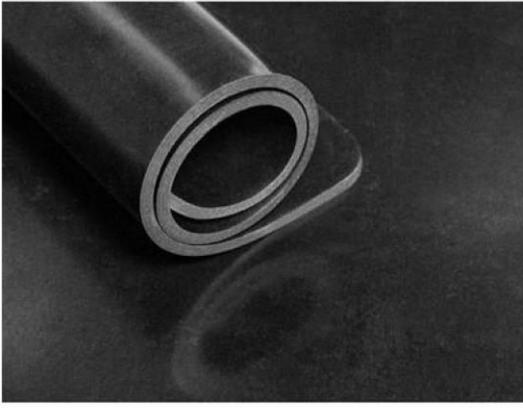

NBR rubber sheet

Satyr 50

Quality:	NBR/SBR
Colour:	Black
Temperature range:	-30° to +90° c
Specific gravity:	1,45 grs/cm ³
Hardness:	50 Share A +/- 5
Tensile strength:	4 Mpa
Elongation at break:	200%

Features: Widely used oil and grease resistant industrial rubber quality with good mechanical properties.

Application: Chemical industries, garages, workshops et cetera.


Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	NB5010 1/0
2	0	-	1,4	10	NB5010 2/0
3	0	-	1,4	10	NB5010 3/0
4	0	-	1,4	10	NB5010 4/0
5	0	-	1,4	10	NB5010 5/0
6	0	-	1,4	10	NB5010 6/0
8	0	-	1,4	5	NB50108/0
10	0	-	1,4	5	NB5010 10/0

EPDM rubber sheets



Premium Rubber Engineered Solutions



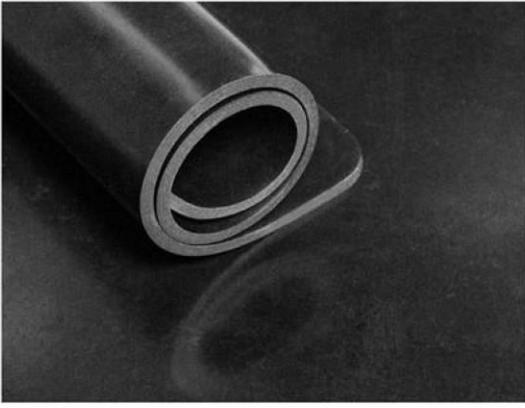

EPDM rubber sheet


Manticore Eco

Quality:	EPDM/SBR
Colour:	Black
Temperature range:	-30° to +90° c
Specific gravity:	1,45 grs/cm ³
Hardness:	70 Share A +/- 5
Tensile strength:	4 Mpa
Elongation at break:	200%

Features: Widely used weather and cold resistant industrial rubber quality with good mechanical properties and chemical resistance. Suitable for open air and good ozone resistance.

Application: Automotive industry, outdoor use and solar panels.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	EP7010 1/0
1,5	0	-	1,4	15	EP7010 1,5/0
2	0/1	nylon	1,2/1,4	10	EP7010 2/0
3	0/1/2	nylon	1,2/1,4	10	EP7010 3/0
4	0/1/2	nylon	1,2/1,4	10	EP7010 4/0
5	0/1/2	nylon	1,2/1,4	10	EP7010 5/0
6	0/2	nylon	1,2/1,4	10	EP7010 6/0
8	0/2	nylon	1,2/1,4	5	EP70108/0
10	0/2	nylon	1,2/1,4	5	EP7010 10/0
12	0	-	1,4	5	EP7010 12/0
15	0	-	1,4	5	EP7010 15/0
20	0	-	1,4	5/2	EP7010 20/0
25	0	-	1,4	5	EP7010 25/0
30	0	-	1,4	2	EP7010 30/0
40	0	-	1,4	2	EP7010 40/0
50	0	-	1,4	2	EP7010 50/0

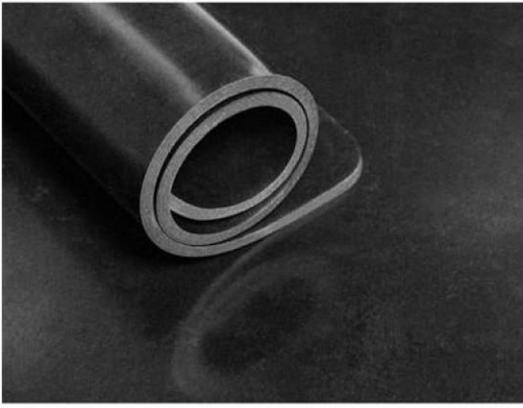

EPDM rubber sheet


Manticore Medium

Quality:	EPDM/SBR
Colour:	Black
Temperature range:	-30° to +90° c
Specific gravity:	1,35 grs/cm'
Hardness:	65 Share A +/- 5
Tensile strength:	6 Mpa
Elongation at break:	250%

Features: Widely used weather and cold resistant industrial rubber quality with good mechanical properties and chemical resistance. Suitable for open air and good ozone resistance.

Application: Automotive industry, outdoor use and solar panels.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	EP651301/0
1,5	1,4	15	EP651301,5/0
2	1,4	10	EP651302/0
3	1,4	10	EP651303/0
4	1,4	10	EP651304/0
5	1,4	10	EP651305/0
6	1,4	10	EP651306/0
8	1,4	5	EP651308/0
10	1,4	5	EP6513010/0

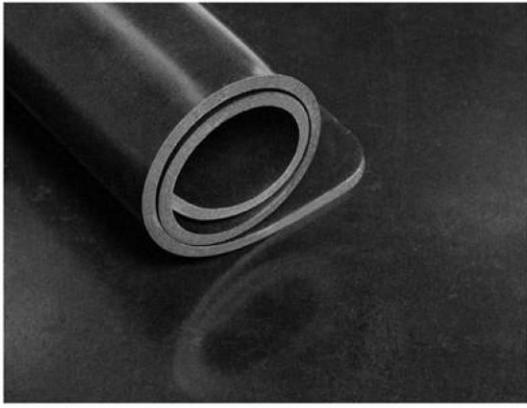

EPDM rubber sheet


Manticore Premium

Quality:	EPDM
Colour:	Black
Temperature range:	-40° to +130° c
Specific gravity:	1,25 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	BMpa
Elongation at break:	350%

Features: Excellent weather and cold resistant industrial rubber quality with good mechanical properties and chemical resistance. Suitable for open air and good ozone resistance.

Application: Automotive industry, hot water seals, outdoor use and solar panels.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	EP65120 1/0
2	1,4	10	EP65120 2/0
3	1,4	10	EP65120 3/0
4	1,4	10	EP65120 4/0
5	1,4	10	EP65120 5/0
6	1,4	10	EP65120 6/0
8	1,4	5	EP651208/0
10	1,4	5	EP65120 10/0

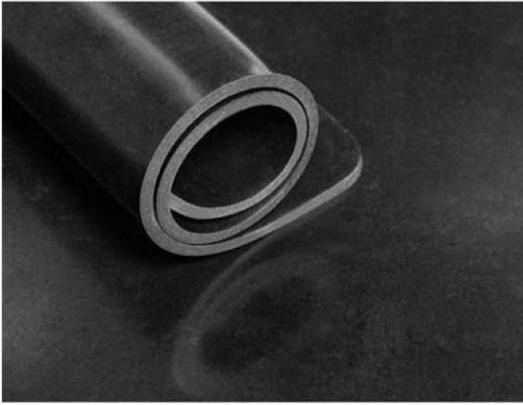

EPDM rubber sheet


Manticore 50

Quality:	EPDM/SBR
Colour:	Black
Temperature range:	-30° to +90° c
Specific gravity:	1,45 grs/cm'
Hardness:	50 Share A +/- 5
Tensile strength:	4 Mpa
Elongation at break:	200%

Features: Widely used weather and cold resistant industrial rubber quality with good mechanical properties and chemical resistance. Suitable for open air and good ozone resistance.

Application: Automotive industry, outdoor use and solar panels.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	EP5010 2/0
3	1,4	10	EP5010 3/0
4	1,4	10	EP50104/0
5	1,4	10	EP5010 5/0
6	1,4	10	EP5010 6/0
8	1,4	5	EP50108/0
10	1,4	5	EP5010 10/0

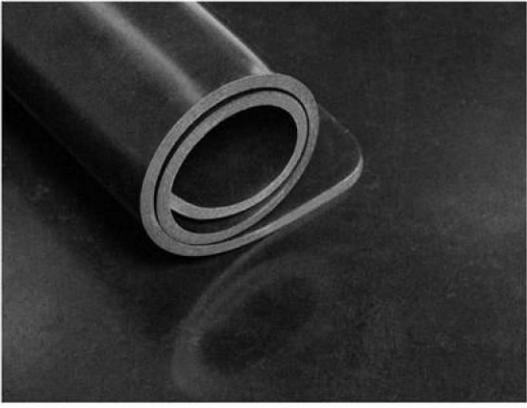

EPDM rubber sheet


Manticore Aqua

Quality:	EPDM
Colour:	Black
Temperature range:	-40° to +120° c
Specific gravity:	1,15 grs/cm ³
Hardness:	70 Share A +/- 5
Tensile strength:	11,5 Mpa
Elongation at break:	350%

Features: Potable water rubber sheet, according to different European standards. Certificates available on request.

Application: Water fitting (supplying) parts e.g., gaskets, membranes, washers that are used in contact with drinking water.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	EP70110W 2/0
3	1,4	10	EP70110W 3/0
4	1,4	10	EP70110W4/0
5	1,4	10	EP70110W 5/0
6	1,4	10	EP70110W6/0
8	1,4	5	EP70110W 8/0
10	1,4	5	EP70110W 10/0

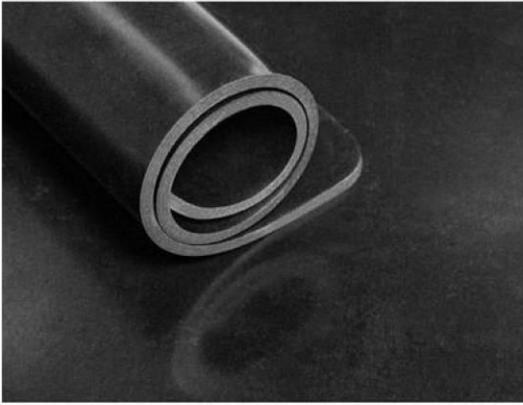

EPDM rubber sheet

Manticore Peroxid

Quality:	EPDM
Colour:	Black
Temperature range:	-40° to +140° c
Specific gravity:	1,25 grs/cm'
Hardness:	70 Share A +/- 5
Tensile strength:	9 Mpa
Elongation at break:	200%

Features: Excellent weather and cold resistant peroxid cured industrial rubber quality with good mechanical properties, chemical resistance and a high temperature range. Suitable for open air and good ozone resistance.

Application: Automotive industry, hot water seals, outdoor use and solar panels.


Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	EP70122PC 1/0
2	1,4	10	EP70122PC 2/0
3	1,4	10	EP70122PC 3/0
4	1,4	10	EP70122PC 4/0
5	1,4	10	EP70122PC 5/0

CR rubber sheets



Premium Rubber Engineered Solutions



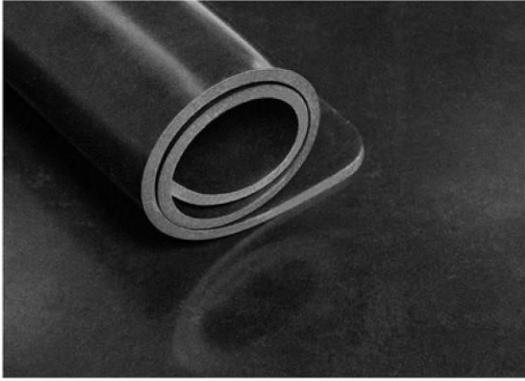

CR rubber sheet


Wendigo Eco

Quality:	CR/SBR
Colour:	Black
Temperature range:	-30° to +90°C
Specific gravity:	1,45 grs/cm ³
Hardness:	70 Shore A +/- 5
Tensile strength:	4 Mpa
Elongation at break:	200%

Features: Widely used chloroprene industrial rubber with good mechanical properties, moderate oil and ozone resistance.

Application: Offshore and industry.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	CR7010 1/0
1,5	0/1	nylon	1,4	10	CR7010 1,5/0
2	0/1	nylon	1,4	10	CR7010 2/0
3	0/1/2	nylon	1,4	10	CR7010 3/0
4	0/1/2	nylon	1,4	10	CR7010 4/0
5	0/1/2	nylon	1,4	10	CR7010 5/0
6	0/2	nylon	1,4	10	CR7010 6/0
8	0/2	nylon	1,4	10	CR7010 8/0
10	0/2	nylon	1,4	5/10	CR7010 10/0
10	0	-	1	1	CR7010 10/0-1x1
12	0	-	1,4	5	CR7010 12/0
15	0	-	1,4	5	CR7010 15/0
15	0	-	1	1	CR7010 15/0-1x1
20	0	-	1,4	5/2	CR7010 20/0
20	0	-	1	1	CR7010 20/0-1x1
25	0	-	1,4	5	CR7010 25/0
25	0	-	1	1	CR7010 25/0-1x1
30	0	-	1,4	2	CR7010 30/0
40	0	-	1,4	2	CR7010 40/0
50	0	-	1,4	2	CR7010 50/0

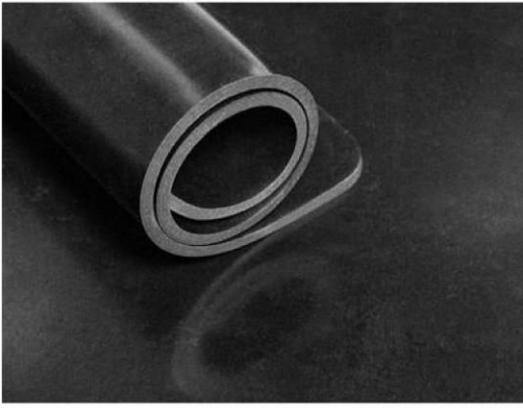

CR rubber sheet


Wendigo Medium

Quality:	CR/SBR
Colour:	Black
Temperature range:	-30° to +90° c
Specific gravity:	1,45 grs/cm ³
Hardness:	70 Share A +/- 5
Tensile strength:	5 Mpa
Elongation at break:	250%

Features: Widely used chloroprene industrial rubber with good mechanical properties, moderate oil and ozone resistance.

Application: Offshore and industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	NE70140 1/0
1,5	1,4	15	NE70140 1,5/0
2	1,4	10	NE70140 2/0
3	1,4	10	NE70140 3/0
4	1,4	10	NE70140 4/0
5	1,4	10	NE70140 5/0
6	1,4	10	NE70140 6/0
8	1,4	5	NE70140 8/0
10	1,4	5	NE70140 10/0

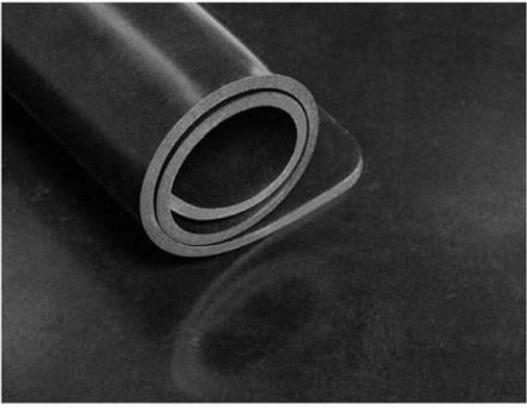

CR rubber sheet


Wendigo Premium

Quality:	CR
Colour:	Black
Temperature range:	-25° to +100° C
Specific gravity:	1,4 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	10 Mpa
Elongation at break:	400%

Features: Excellent chloroprene industrial rubber with good resistance to heat, ozone, weathering and oil. Gives good adhesive to metal and has flame retardant properties.

Application: Offshore and industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	NE65140 1/0
2	1,4	10	NE65140 2/0
3	1,4	10	NE65140 3/0
4	1,4	10	NE65140 4/0
5	1,4	10	NE65140 5/0
6	1,4	10	NE65140 6/0
10	1,4	5	NE65140 10/0

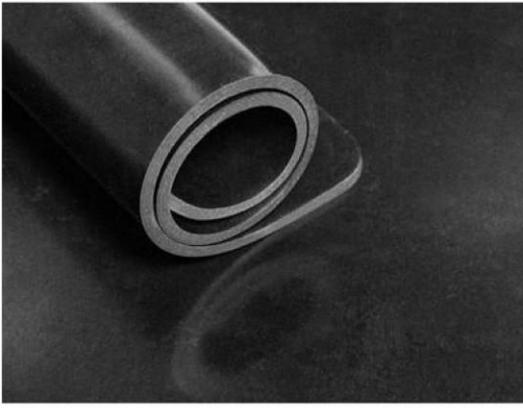

CR rubber sheet

Wendigo 50

Quality:	CR/SBR
Colour:	Black
Temperature range:	-30° to +90° c
Specific gravity:	1,45 grs/cm'
Hardness:	50 Share A +/- 5
Tensile strength:	4 Mpa
Elongation at break:	200%

Features: Widely used chloroprene industrial rubber with good mechanical properties, moderate oil and ozone resistance.

Application: Offshore and industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	CR5010 2/0
3	1,4	10	CR5010 3/0
4	1,4	10	CR5010 4/0
5	1,4	10	CR5010 5/0
6	1,4	10	CR5010 6/0
8	1,4	5	CR5010 8/0
10	1,4	5	CR5010 10/0

Para



Premium Rubber Engineered Solutions





Para

Typhon

Quality:	NR (Para)
Colour:	Beige, Grey
Temperature range:	-30° to +70° c
Specific gravity:	1,10 grs/cm ³
Hardness:	45 Share A +/- 5
Tensile strength:	15 Mpa
Elongation at break:	600%
Abrasion:	100 mm ³

Features: Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion.

Application: Very wide range of applications, conveyor systems, pumps et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Colour	Article nr.
1	1,4	20	Beige	AB45110 1/0
1,5	1,4	15	Beige, Grey	AB45110 1,5/0
2	1,4	10	Beige, Grey	AB45110 2/0
3	1,4	10	Beige, Grey	AB45110 3/0
4	1,4	10	Beige, Grey	AB45110 4/0
5	1,4	10	Beige, Grey	AB45110 5/0
6	1,4	10	Beige, Grey	AB45110 6/0
8	1,4	5	Beige, Grey	AB45110 8/0
10	1,4	5	Beige, Grey	AB45110 10/0
12	1,4	5	Beige	AB45110 12/0
15	1,4	5	Beige	AB45110 15/0
20	1,4	5	Beige	AB45110 20/0



Para

Centaur Red (BL)

Quality:	NR (Para)
Colour:	Red
Temperature range:	-30° to +70° c
Specific gravity:	1,10 grs/cm ³
Hardness:	45 Share A +/- 5
Tensile strength:	15 Mpa
Elongation at break:	600%
Abrasion:	100 mm ³

Features: Natural rubber quality with good mechanical properties, abrasion resistance, low temperature flexibility and excellent adhesion (Also available with bonding layer).

Application: Very wide range of applications, conveyor systems, pumps et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Also available with	Article nr.
1	1,4	20	-	AB45110R 1/0
1,5	1,4	15	-	AB45110R 1,5/0
2	1,4	10	-	AB45110R 2/0
3	1,4	10	-	AB45110R 3/0
4	1,4/2	10	bonding layer	AB45110R 4/0
5	1,4	10	bonding layer	AB45110R 5/0
6	1,4/2	10	bonding layer	AB45110R 6/0
8	1,4/2	10	bonding layer	AB45110R 8/0
10	1,4/2	10	bonding layer	AB45110R 10/0
12	2	10	bonding layer	AB45110R 12/0
15	1,4/2	10	bonding layer	AB45110R 15/0
20	1,4/2	10	bonding layer	AB45110R 20/0




Para Red Dragon

Quality:	NR (Para)
Colour:	Red
Finish:	One side smooth other side fabric finish
Temperature range:	-40° to +75° C
Specific gravity:	0,98 grs/cm'
Hardness:	38 Share A +/-5
Tensile strength:	25 Mpa
Elongation at break:	900%
Abrasion:	80 mm'

Features: Premium resistance to abrasion with excellent tensile strength and high elasticity.

Application: Lining of slurry chutes, wear protection, conveyer systems and shooting ranges.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	Abrasuper40 2/0
3	1,4	10	Abrasuper40 3/0
4	1,4	10	Abrasuper40 4/0
5	1,4	10	Abrasuper40 5/0
6	1,4	10	Abrasuper40 6/0
8	1,4	5	Abrasuper40 8/0
10	1,4	5	Abrasuper40 10/0
30	1,4	5	Abrasuper40 30/0

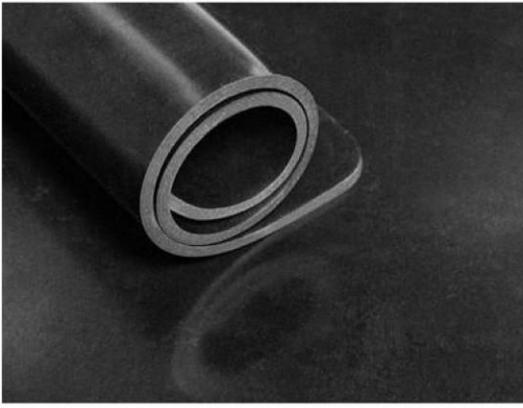

Para


Centaur Black 40

Quality:	NR (Para)
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,10 grs/cm ³
Hardness:	40 Shore A +/- 5
Tensile strength:	17 Mpa
Elongation at break:	600%
Abrasion:	120 mm ³

Features: Good resistance to abrasion with high tensile strength and elasticity.

Application: Widely used in shot blasting industry, rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
4	1,4	10	AB401104/0
6	1,4	10	AB401106/0
8	1,4	10	AB401108/0
10	1,4	10	AB40110 10/0
15	1,4	10	AB40110 15/0
20	1,4	10	AB40110 20/0

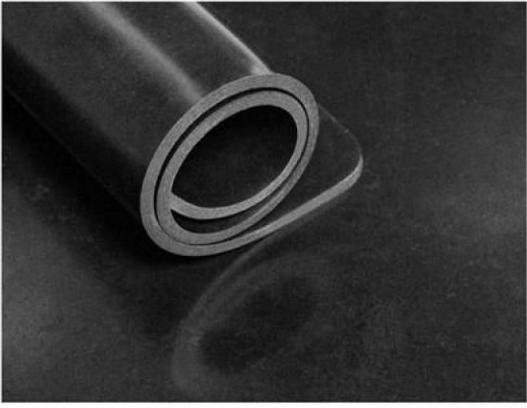

Para

Centaur Black (BL)

Quality:	NR (Para)
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,17 grs/cm'
Hardness:	60 Share A +/- 5
Tensile strength:	13 Mpa
Elongation at break:	450%
Abrasion:	120 mm'

Features: Good resistance to abrasion with high tensile strength, elasticity and excellent adhesion. (Also available with bonding layer).

Application: Widely used in rubber lining for material handling equipment or any other crucial application to reduce wear and tear.

Thickness (mm)	Width (mtr)	Length (mtr)	Also available with	With bonding layer available with	Article nr.
3	1,4	10			AB60117 3/0
4	1,4	10	-		AB60117 4/0
5	1,4	10	-		AB60117 5/0
6	1,4/2	10	bonding layer	1,4/2	AB60117 6/0
8	1,4/2	10	bonding layer	1,4/2	AB60117 8/0
10	1,4/2	10	bonding layer	1,4/2	AB60117 10/0
12	2	10	bonding layer	2	AB60117 12/0
15	1,4/2	10	bonding layer	2	AB60117 15/0
20	1,4/2	10	bonding layer	1,4/2	AB60117 20/0
25	1,4/2	10	bonding layer	2	AB60117 25/0
30	1,4/2	10	bonding layer	2	AB60117 30/0



Para Typhon Dustsealing

Quality: NR (Para)
Colour: Black
Temperature range: -25° to +70° c
Specific gravity: 0,98 grs/cm'
Hardness: 40 Share A +/- 5
Tensile strength: 20 Mpa
Elongation at break: 650%
Abrasion: 90 mm'

Features: A black soft NR sheet with bath sides fabric finish.

Application: Used as dustsealing.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1,5	1,4	20	AB40100SP 1,5/0
2	1,4	20	AB40100SP 2/0

Food Grade rubber sheets



Premium Rubber Engineered Solutions





Food Grade rubber sheets

Pegasus SBR

Quality:	NR/SBR
Colour:	Off white
Temperature range:	-30° to +70° c
Specific gravity:	1,5 grs/cm ³
Hardness:	60Share A +/- 5
Tensile strength:	6 Mpa
Elongation at break:	300%

Features: A white, odourless and tasteless SBR rubber with excellent mechanical properties. Food quality according to FDA and EC1935/2004.

Application: Food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	SB60150F 1/0
2	1,4	10	SB60150F 2/0
3	1,4	10	SB60150F 3/0
4	1,4	10	SB60150F 4/0
5	1,4	10	SB60150F 5/0
6	1,4	10	SB60150F 6/0
8	1,4	5	SB60150F 8/0
10	1,4	5	SB60150F 10/0
15	1,4	5	SB60150F 15/0



Food Grade rubber sheets

Pegasus NBR

Quality:	NBR
Colour:	Off white
Temperature range:	-35° to +100° (
Specific gravity:	1,40
Hardness:	60 Share A +/- 5
Tensile strength:	6 Mpa
Elongation at break:	350%

Features: A white, odourless and tasteless NBR rubber, resistant to natural oils and grease. Food quality according to FDA and EC1935/2004.

Application: Food industry.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
1	0	-	1,4	20	NB60140F 1/0
2	0	-	1,4	10	NB60140F 2/0
3	0/1	cotton	1,4	10	NB60140F 3/0
4	0/1	cotton	1,4	10	NB60140F 4/0
5	0	-	1,4	10	NB60140F 5/0
6	0	-	1,4	10	NB60140F 6/0
8	0	-	1,4	5	NB60140F8/0
10	0	-	1,4	5	NB60140F 10/0



Food Grade rubber sheets

Pegasus EPDM

Quality:	EPDM
Colour:	Off white
Temperature range:	-25 to +140 °C
Specific gravity:	1,30
Hardness:	60 ShoreA +/- 5
Tensile strength:	5 Mpa
Elongation at break:	300%

Features: A white, odourless and tasteless EPDM rubber with a high temperature range. Food quality according to FDA and EC1935/2004.

Application: Food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	EP60130F1/0
2	1,4	10	EP60130F2/0
3	1,4	10	EP60130F3/0
4	1,4	10	EP60130F4/0
5	1,4	10	EP60130F5/0
6	1,4	10	EP60130F 6/0
8	1,4	5	EP60130F 8/0
10	1,4	5	EP60130F10/0



Food Grade rubber sheets

Pegasus CR

Quality:	CR
Colour:	Off white
Temperature range:	-35° to +120° (
Specific gravity:	1,45
Hardness:	65 Share A +/- 5
Tensile strength:	5 Mpa
Elongation at break:	250%

Features: A white, odourless and tasteless CR rubber according to FDA.

Application: Food industry.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,4	20	NE65145F 1/0
2	1,4	10	NE65145F 2/0
3	1,4	10	NE65145F 3/0
5	1,4	10	NE65145F 5/0



Food Grade rubber sheets

Viking

Quality:	Silicone
Temperature range:	-90° to +230° C
Specific gravity:	1,20
Hardness:	60 Share A +/- 5
Tensile strength:	6 Mpa
Elongation at break:	200%

Features: Excellent silicone quality with resistance to extreme temperatures. Food quality according to FDA and EC1935/2004.

Application: Food industry, building industry, freezers, boilers, railway industry et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Colour	Article nr.
1	1,2	10	Transparent, Red, Blue	SI60120F 1/0
1,5	1,2	10	Transparent, Red, Blue	SI60120F 1,5/0
2	1,2	10	Transparent, Red, Blue, White	SI60120F 2/0
3	1,2	10	Transparent, Red, Blue, White	SI60120F3/0
4	1,2	10	Transparent, Red, Blue	SI60120F 4/0
5	1,2	10	Transparent, Red, Blue, White	SI60120F 5/0
6	1,2	10	Transparent, Red, Blue	SI60120F 6/0
8	1,2	5	Transparent, Red, Blue	SI60120F 8/0
10	1,2	5	Transparent, Red, Blue, White	SI60120F 10/0



Food Grade rubber sheets

Viking 40

Quality:	Silicone
Colour:	Transparent
Temperature range:	-90° to +230° C
Specific gravity:	1,20
Hardness:	40 Share A +/- 5
Tensile strength:	6 Mpa
Elongation at break:	200%

Features: Excellent silicone quality with resistance to extreme temperatures. Food quality according to FDA and EC1935/2004.

Application: Food industry, building industry, freezers, boilers, railway industry et cetera.


Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,2	10	SI40120F 2/0
3	1,2	10	SI40120F 3/0
4	1,2	10	SI40120F 4/0

rubber sheets



Premium Rubber Engineered Solutions



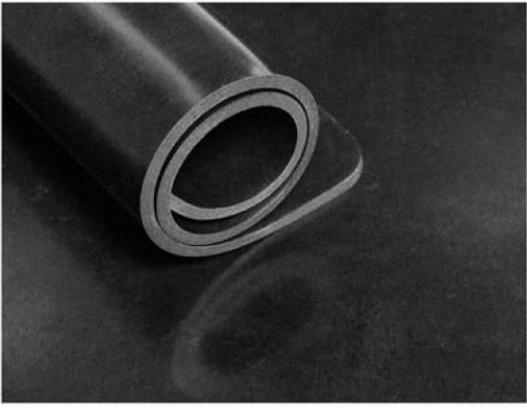

FKM rubber sheets

Karibu FKM A

Quality:	FKM
Colour:	Black
Temperature range:	-30° to +250° C
Specific gravity:	1,95 grs/cm ³
Hardness:	72 Share A +/- 5
Tensile strength:	5 Mpa
Elongation at break:	200%

Features: Excellent resistance to oxygen, ozone and natural weathering and also outstanding resistance to compression, especially at elevated temperatures. Its resistance to most solvents and chemicals give long service life as it has excellent resistance against hydrocarbons, aliphatic, aromatic and chlorinated chemicals and resistance to acids and alkalis including oxidants.

Application: Gaskets in extreme circumstances.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
1	1,2	10	FPG72190G 1/0
1,5	1,2	10	FPG72190G 1,5/0
2	1,2	10	FPG72190G 2/0
3	1,2	10	FPG72190G 3/0
4	1,2	10	FPG72190G 4/0
5	1,2	10	FPG72190G 5/0
6	1,2	10	FPG72190G 6/0
8	1,2	5	FPG72190G 8/0
10	1,2	5	FPG72190G 10/0
12	1,2	5	FPG72190G 12/0

Various



Premium Rubber Engineered Solutions





Various

Kabira Neobenzid

Quality:	NBR/PVC
Colour:	Green
Temperature range:	-25° to +100° C
Specific gravity:	1,45 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	6,5 Mpa
Elongation at break:	350%

Features: Good resistance to oils and good mechanical properties, no permeability of gases, moderate aging properties.

Application: Petrochemical industries, garages, workshops et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	NB65145G 2/0
3	1,4	10	NB65145G 3/0
4	1,4	10	NB65145G 4/0
5	1,4	10	NB65145G 5/0
6	1,4	10	NB65145G 6/0
8	1,4	5	NB65145G 8/0
10	1,4	5	NB65145G 10/0



Various


Serra CSM

Quality:	CSM
Colour:	Black
Temperature range:	-30° to +140 C
Specific gravity:	1,40 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	10 Mpa
Elongation at break:	350%

Features: CSM rubber is very resistant to oxygen and ozone and shows excellent weathering resistance.

Application: Excellent abrasion resistant and good flame resistant properties.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	HN65140 2/0
3	1,4	10	HN65140 3/0
4	1,4	10	HN651404/0
5	1,4	10	HN651405/0
6	1,4	10	HN65140 6/0

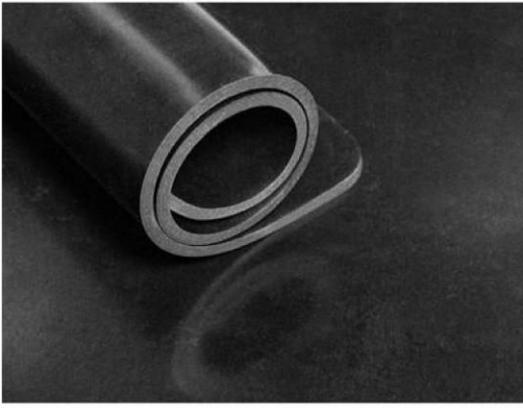

Various

Rama Butyl

Quality:	IR
Colour:	Black
Temperature range:	-40° to +125° C
Specific gravity:	1,20 grs/cm'
Hardness:	60 Share A +/- 5
Tensile strength:	9 Mpa
Elongation at break:	350%

Features: Butyl rubber quality with a very low permeability to air and other gases, excellent resistance to ozone, oxidation and sunlight and an excellent temperature range.

Application: Gaskets, vibration damping and shock absorption applications.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2	1,4	10	IR601202/0
3	1,4	10	IR601203/0
4	1,4	10	IR601204/0
5	1,4	10	IR601205/0

Matting



Premium Rubber Engineered Solutions





Rubber matting

Cobra

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,5 grs/cm ³
Hardness:	70 Share A +/- 5
Tensile strength:	3 Mpa
Elongation at break:	200%

Features: Excellent anti-slip floor mat available in 2 meter width.

Application: Car trunks, horse trailers, entrances et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
3	0	-	1,7/1,8/2	10	SX70150C 3/0
4	2	nylon	2	10	SX70150C 4/2
5	0	-	2	10	SX70150C 5/0
6	2	nylon	1,7/2	10/12	SX70150C 6/2
8	1	nylon	1,7/2	10/12	SX70150C 8/1



Rubber matting

Feniks Insulation Mat

Quality:	EPDM/SBR
Temperature range:	-25° to +120° c
Specific gravity:	1,5 grs/cm ³
Hardness:	70 Share A +/- 5
Tensile strength:	5 Mpa
Elongation at break:	250%
Abrasion:	300 mm ³

Features: Strong and abrasion resistant. Fine ribbed design on one side and a fine cloth impression pattern on the other side. Electrically insulating according to the standard IEC CEI 61111.

Application: Switchboard flooring to prevent against electrical shocks.

Class	Colour	Thickness (mm)	Proof Test Voltage	Resistance	Maximum use voltage	Width (mtr)	Length (mtr)	Article Nr.
2	Grey, Black	3	20 kV	30 kV	17 kV	1/1,2	10	ELS30000 3/0
4	Grey	4,5	40 kV	50 kV	36 kV	1/1,2	10	ELS50000 4,5/

For more specialised rubber solutions visit: Premiumrubber.eu



Rubber matting

Saturn Fine Rib

Quality:	NR/SBR
Colour:	Black, Grey
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm'
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm'

Features: Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

Application: Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Colour	Article nr.
3	0/1	cotton	1/1,2	10	Black	MR65 3/0
3	0	-	1/1,2/1,4	10	Grey	MR65G 3/0
4	0	-	1	10	Black	MR65 4/0



Rubber matting

Saturn Basic Fine Rib

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm'
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm'

Features: Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

Application: Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Quality	Article nr.
2,7	0,2/0,3/0,4/0,5/0,6 0,7/1/1,2/1,4	10	NR/SBR	MR65SX 2,7/0
2,7	1/1,2	10	NBR/SBR	MR65NBR 2,7/0



Rubber matting


Saturn Eco Fine Rib

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm ³

Features: Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

Application: Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
2,5	1/1,2	10	MN65 2,5/0

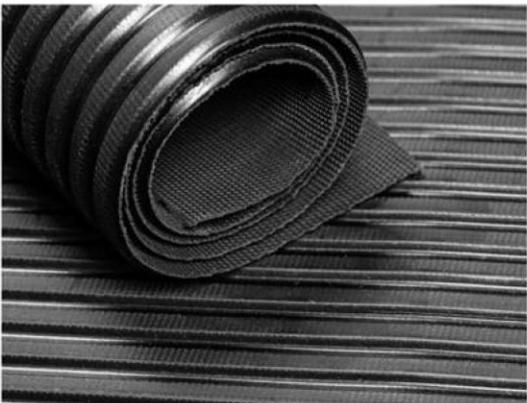

Rubber matting

Athena Broad Rib

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm ³

Features: Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

Application: Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1/1,2/1,4/1,6	10	CR65 3/0



Rubber matting

Freva Block Rib

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm'
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm'

Features: Anti-slip ribbed surface on one side and a fine cloth impression pattern on the other side.

Application: Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,2	10	LS65 3/0



Rubber matting

Hurricane Wide Rib

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm'
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm'

Features: Excellent non-slip surface for optimum safety on one side and a fine cloth impression pattern on the other side. Abrasion resistance helps to prevent accidents in all weather conditions.

Application: This multipurpose mat is ideal for bath wet & dry areas. It is easy to clean with little maintenance.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
5	1/1,2	10	BR65 5/0
6	1/1,2	10	BR65 6/0



Rubber matting

Hurricane Eco Wide Rib

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,5 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	3 Mpa
Elongation at break:	200%

Features: Excellent non-slip surface for optimum safety on one side and a fine cloth impression pattern on the other side. Abrasion resistance helps to prevent accidents in allweather conditions.

Application: This multipurpose mat is ideal for bathwet & dry areas. It is easy to cleanwith little maintenance.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
5	1/1,2	10	BR65SX5/0
6	1/1,2	10	BR65SX6/0



Rubber matting

Hector Truck Rib

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm ³

Features: Deep rib design surface on one side and a fine cloth impression pattern on the other side.

Application: A non skid grip that helps to keep cargo in place and prevent damage to the truck beds from sliding cargo.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
4,5	2	10	TL65 4,5/0
6	2	10	TL65 6/0



Rubber matting


Vidar Coin Mat

Quality:	NR/SBR
Temperature range:	-30° to +70° c
Specific gravity:	1,6 grs/cm'
Hardness:	80 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	500 mm'

Features: Raised circular design surface on one side and a fine cloth impression pattern on the other side.

Application: Indoor application such as airports, hotels, cabins, exhibitions et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Colour	Article nr.
3	1/1,2	10	Black, Grey, Dark Blue, Brown	CS80 3/0
4,5	1/1,2	10	Black	(5804,5/0

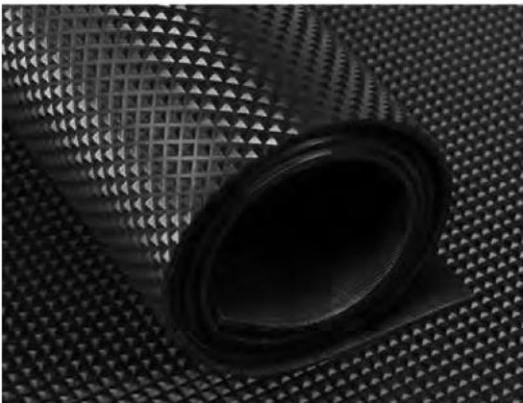

Rubber matting


Sphinx Pyramid Mat

Quality:	NR/SBR
Colour:	Black, Grey
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm'
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm'

Features: A high relief pyramid design on one side and a fine cloth impression pattern on the other side.

Application: Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,2	10	5D65 3/0

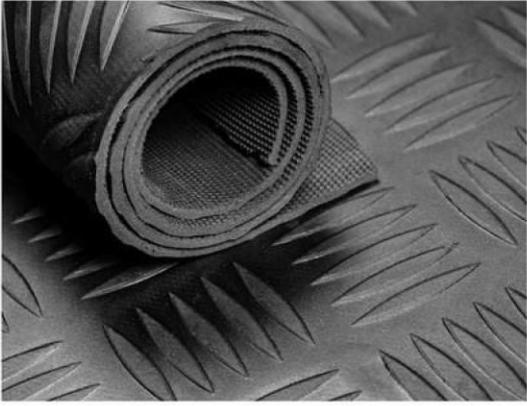

Rubber matting


Odin Checker Mat

Temperature range: -30° to +70° c
Specific gravity: 1,45 grs/cm³
Hardness: 65 Share A +/- 5
Tensile strength: 3,5 Mpa
Elongation at break: 250%
Abrasion: 300 mm³

Features: Continuous checkered field design surface on one side and a fine cloth impression pattern on the other side.

Application: Car trunks, horse trailers, entrances et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Quality	Colour	Article nr.
3	1/1,2/1,4/1,5/1,6	10	NR/SBR	Black	CD65 3/0
3	1,4	10	NR/SBR	Grey	CD65G 3/0
3	1,4	10	NBR/SBR	Black	CD65NBR 3/0
5	1,4	10	NR/SBR	Black	CD65 5/0

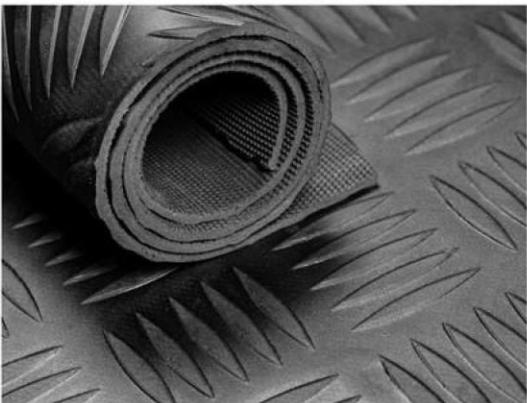

Rubber matting

Odin Eco Checker Mat

Quality: NR/SBR
Colour: Black
Temperature range: -30° to +70° c
Specific gravity: 1,5 grs/cm³
Hardness: 65 Share A +/- 5
Tensile strength: 3 Mpa
Elongation at break: 200%

Features: Continuous checkered field design on one side and a fine cloth impression pattern on the other side.

Application: Car trunks, horse trailers, entrances et cetera.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1/1,2/1,4/1,5/1,6	10	CD65SX 3/0



Rubber matting

Seltos Diamond Checker

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm'
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm'

Features: Floormat with continuous tear field design on one side and a fine cloth impression pattern on the other side. Available up to 2,2 meter width.

Application: Car trunks, horse trailers, entrances et cetera.

Thickness (mm)	Insertion(s) (no.)	Insertion type	Width (mtr)	Length (mtr)	Article nr.
3	0	-	1,5/1,8/2/2,2	10	DCD65 3/0
5	0	-	2	10	DCD65 5/0
6	2	nylon	2	10	DCD65 6/2
8	1	nylon	2	10	DCD65 8/1



Rubber matting


Amoeba Mat

Quality:	NR/SBR
Colour:	Black
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm'
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250%
Abrasion:	300 mm'

Features: Anti-slip surface on one side and a fine cloth impression pattern on the other side.

Application: Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,5	10	AM65 3/0

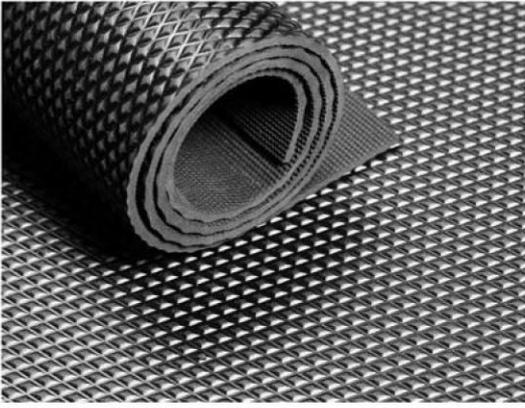

Rubber matting


Zenith Diamond Mat

Quality:	NR/SBR
Colour:	Black, Grey
Temperature range:	-30° to +70° c
Specific gravity:	1,45 grs/cm ³
Hardness:	65 Share A +/- 5
Tensile strength:	3,5 Mpa
Elongation at break:	250 %
Abrasion:	300 mm ³

Features: A high relief diamond design surface on one side and a fine cloth impression pattern on the other side.

Application: Loose lay applications for floors, walkways, runners, loading areas, workbenches and general-purpose areas.

Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
3	1,2	10	D065 3/0

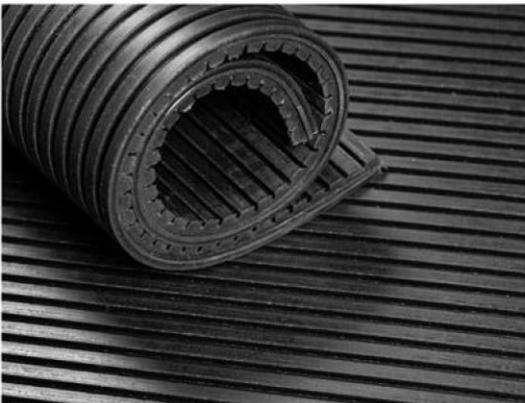

Rubber matting

Novibramat

Quality:	NR/SBR
Colour:	Black
Temperature range:	-20° to +80° c
Specific gravity:	1,2 grs/cm ³
Tensile strength:	5 Mpa
Elongation at break:	300%
Max load:	8 kg/cm ²

Features: Anti-vibration rubber mat with rib design in 90 degrees angle.

Application: To prevent machines from vibrating and reduce noise.

Hardness (Shore A +/-5)	Thickness (mm)	Width (mtr)	Length (mtr)	Article nr.
45	8/10	0,5	0,5	AV45 0,5
45	8/10	1	1	AV45 1
70	8/10	0,5	0,5	AV70 0,5
70	8/10	1	1	AV70 1

For more specialised rubber solutions visit: Premiumrubber.eu



Premium Rubber

Engineered Solutions

Contact us via:



[Premiumrubber.eu](https://www.premiumrubber.eu)



info@premiumrubber.eu



+31648488145